



Control unit for DURAVISION LED lights.

Black aluminium cabinet, with glass front plate.

Quick installation, wall mounting bracket and push-in connectors reduce installation time and effort.

Stable 12VAC output regardless of the voltage input.

Connected with our **DURA Cloud App** by Bluetooth and Wi-Fi.

OneTouch LED, indicates the state of the controller.
Push the OneTouch LED, to switch the LED lights ON or OFF.

Basic **ON/OFF communication technology**, for all DURAVISION lights.

Advanced and unique **DuraNet Communication Technology***
in combination with compatible DURAVISION lights:

- Free choice of colour
- Dimming
- LINK Touch compatible, if the option module is installed
- DMX512/RS485 compatible
- Automatic synchronisation

Connection to **home automation system** via RS485 or DMX512.

Control of external devices such as garden lighting or pool cover via 3 onboard relay contacts.

Available option:

- LoRa module, wireless connection with **LINK Touch** remote control, and 2 relay contacts

Connect several controllers to operate as one, using the RS485 connection.

DURA Cloud App

p. 92




* DuraNet Communication Technology

Unique communication protocol over the power cable. Allows full control of connected Duratech products with a single cable.

Technical Specifications

PRODUCT CODE		LINK-THREE-340
Type of control DURAVISION		ON/OFF & DuraNet
DURA Cloud App		✓
Bluetooth BLE		✓
Wi-Fi 2,4GHz		✓
LINK Touch compatible		Optional via LoRa module
Nominal input voltage	VAC	230
Output power	VA	340
Output voltage (SELV)	VAC	12
Relay contacts		3 + 2 Optional via LoRa module
RS485/DMX512		2
IEC protection class		Class I
IP class		IP54
Unit dimensions (L*W*H)	mm	345*240*66
Net weight	kg	2,44
Warranty	year	2

Option module

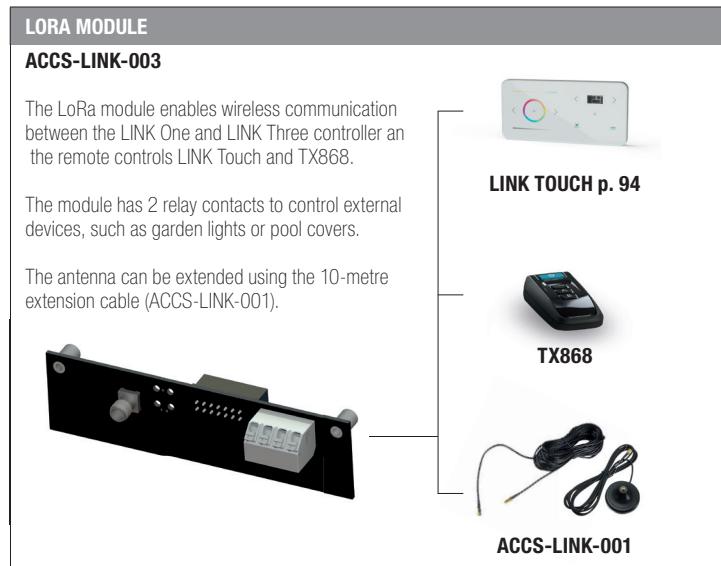

To combine with

LED LIGHTING	
VISION Spectra DVM	p. 10
VISION Spectra DVS	p. 12
VISION Adagio Pro	p. 14
VISION Allegro	p. 16
VISION Pro	p. 18
VISION Moonlight	p. 40