


Manual / Description pool cover SafeTop®

- Material PVC-liner 0,60 mm blue
- Cover is produced according the shape of the steel wall pool (round, oval shaped, eight shaped)
- Cover edge with hang-in-profile P3. Cover will be hanged into the style-handrail



- including zipper. If opening the zipper, you can take away the cover, the upper part of the cover remains in the Style-handrail
- Width of the upper part appr. 5 cm > zipper > distance to water surface appr. 25 cm > cover (please see as an example the following drawing which shows the SafeTop for a pool with Standard-rail)

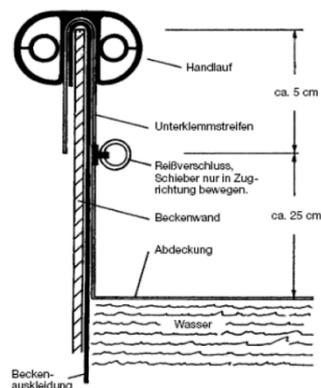

Installation:

- please lay some polystyrene plates onto the water surface as a “support” for the cover (so that cover will not sink down during installation)
- place the beginning of the zipper where the skimmer is located or at oval- and eight shaped pools in the middle of the curve (which is usually also the location of the skimmer)
- hang in the cover into the Style-handrail
- take away again the polystyrene plates

Taking away:

- Pump out rainwater and take away dirt which stays on the cover

Cleaning and care:

- Clean with clear water, if necessary with cleaner for swimming pool liners.
- Cover must be stored folded at a shady place. For a longer time, cover must be stored also clean and dry. Zipper must be treated with Vaseline from time to time.

Winter:

- Never move the cover at minus temperatures. Never take away ice from the cover

Warranty

- 3 years warranty for the following characteristics: UV-resistant, rot-resistant, tightness of the welding seam, frozen-resistant.
- No warranty on the zipper, which is a wear part.

ATTENTION: max. possible weight onto the cover is 30-100 kg, depending on pool shape, pool size, kind of the handrail. It is **NOT ALLOWED** to walk or to stay onto the cover !